


C322C224M5U5TA{Bulk}

aka C322C224M5U5TA

Ceramic Capacitor, Radial, 0.22 uF, 20% Tol, 50V, 0.2" Lead Spacing

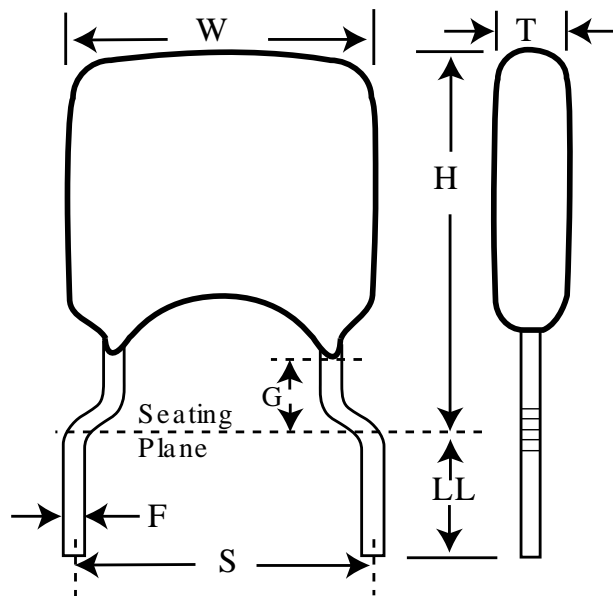

Dimensions (in)

Specifications

ID	Dimension	Tolerance	Capacitance:	0.22 uF
H	0.26	max	Tolerance:	20%
T	0.125	max	Voltage:	50V
L	0.2	max	Temperature Coefficient:	Z5U
S	0.2	+/-0.03	Body Type:	Conformal
LL	0.276	min	Lead Spacing:	0.2"
F	0.02	+0.004/-0.001	Lead Form:	Hockey Stick
G	0.031	ref	Lead Type:	Standard Leads
			Packaging:	Bulk, Bag
			Package Quantity:	500